


3D adjustable door hinge

Thank you for purchasing one of our quality timber door sets. Our timber doors are designed for the UK climate and are designed with moving tolerances for seasonal movement of timber. Every piece is unique and behaves slightly differently as it is anatural material. Sometimes you will need to adjust the hinges if the opening and closing of your door becomes obstructed due to slight movement.

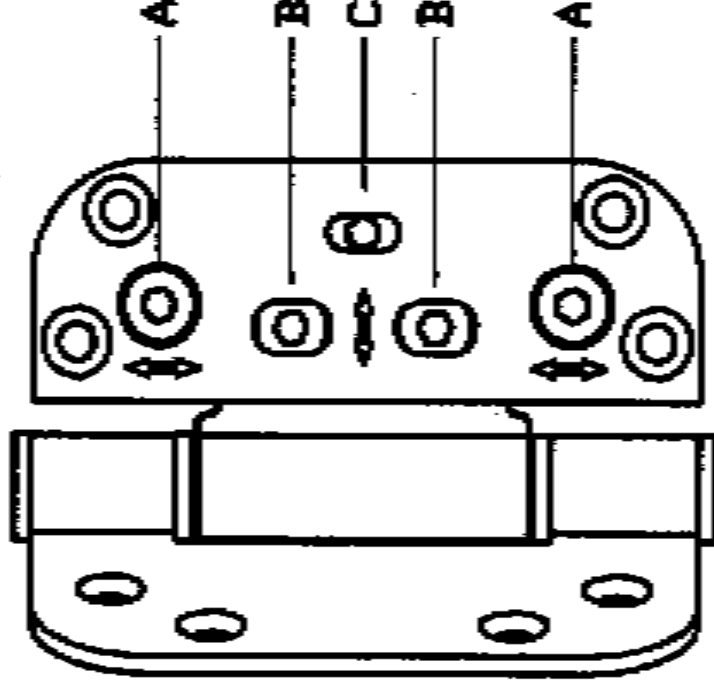

HINGE ADJUSTMENT SEQUENCE

1. VERTICAL ADJUSTMENT

SLACKEN 'A' SCREWS ON ALL HINGES. ADJUST DOOR TO CORRECT HEIGHT AND RETIGHTEN SCREWS.

2. HORIZONTAL ADJUSTMENT

PARTIALLY SLACKEN 'B' SCREWS ON HINGE, TURN SCREW 'C' ANTICLOCKWISE TO MOVE LEAVES APART AND CLOCKWISE TO BRING THEM TOGETHER.
RETIGHTEN 'B' SCREWS AFTER ADJUSTMENT.
(NOTE: HINGES SUPPLIED SET WITH 2mm HINGE GAP)

3. SEAL COMPRESSION ADJUSTMENT

SLACKEN 'B' SCREWS ADJUST DOOR TO CORRECT COMPRESSION ON SEAL, RETIGHTEN SCREWS.

Note for installers: Always leave the touch up paint with the customers