

Company Name:

Surveyor:

Customer Ref:..... **Date:**.....

Location in the house:.....

W: _____ **x H:** _____

Quantity the same: (only 1 style per page)

Concealed Trickle Vents? 1. No 2. Yes,
Airflow required? _____ mm² **QTY** required? _____

Colour of furniture? POLISHED CHROME / SATIN CHROME /
 POLISHED BRASS / ANTIQUE PEWTER / ANTIQUE BLACK

Child locks 100mm Restrictor (only if no inside horns): YES or NO

Timber types
Frames & Cill:
 1. SW: Pine (Redwood, any finish)
 2. HW: Sapele/Meranti (Smooth finish only)
 3. HW: Oak (Stain, Natural finish only)
 4. SW: Pine (Redwood) Frame + HW Cills (Sapele)

Colour and finish inside and outside:
Brushed* or Sprayed?
 1. Fully finished Satin White - Natural / Smooth / Grainy
 2. Satin RAL, N°: _____ - Natural / Smooth / Grainy
 3. Satin Stained, N°: _____ - Natural only
 * Brushed technique allows for Natural and Grainy finish only.

Horns (decorative, outside only):
 1. Standard as drawn here
 2. Custom - draw design in empty field
 3. None

Architrave: (standard OG, painted to match window)
 1. YES – 70mm only // a. Top & Sides OR b. All 4 sides?
 2. NO

Architrave to wall fillers // Top & Sides OR All 4 sides?
 1. YES, size? Write W x H here →
 2. NO

Internal window board:
 1. YES // Factory bull nosed ends? Yes or No
 • Depth: 50 / 100 / 150 / 200 mm
 ▪ Length (inc bull nosed ends) _____ mm.
 2. NO

Cill projection? (From outside face of 135mm frame)
 1. YES, Frame Depth + _____ mm = _____ mm overall,
 Protruded Cill Length each side, to wrap around wall:
 None or + 50mm or + 100mm or + 200mm each side?
 2. NONE

Arched Top Options:
 1. None
 2. Arched Tops (Arched Frame & Top Sash)
 3. Arched Tops (Arched Top Sash Timber Corners,
 Square Frame Arched Outside Under Brick Work)
 4. Swept Heads (Arch in Sash Only, Frames All Square)


Slim glass filled with Krypton (4-6-4 = 14mm overall):
Glass by ATW or Customer?

TOP: Clear Std or Obscure type? _____ (Circle) / Safety?
BOTTOM: Clear Std or Obscure type? _____ (Circle) / Safety?

EXTERNALLY GLAZED WITH TRUE PUTTY & BLACK SPACER BAR
AS STANDARD

Glazing (Georgian) bar: YES or NO (select type and draw
 where required onto each sash as dotted line, e.g. - - - - -)
 • 18mm or 20mm through glass with separate glass units.

Fire Escape: YES / NO (min clear bottom area dimensions to be
 450mmx755mm>0.34m²)

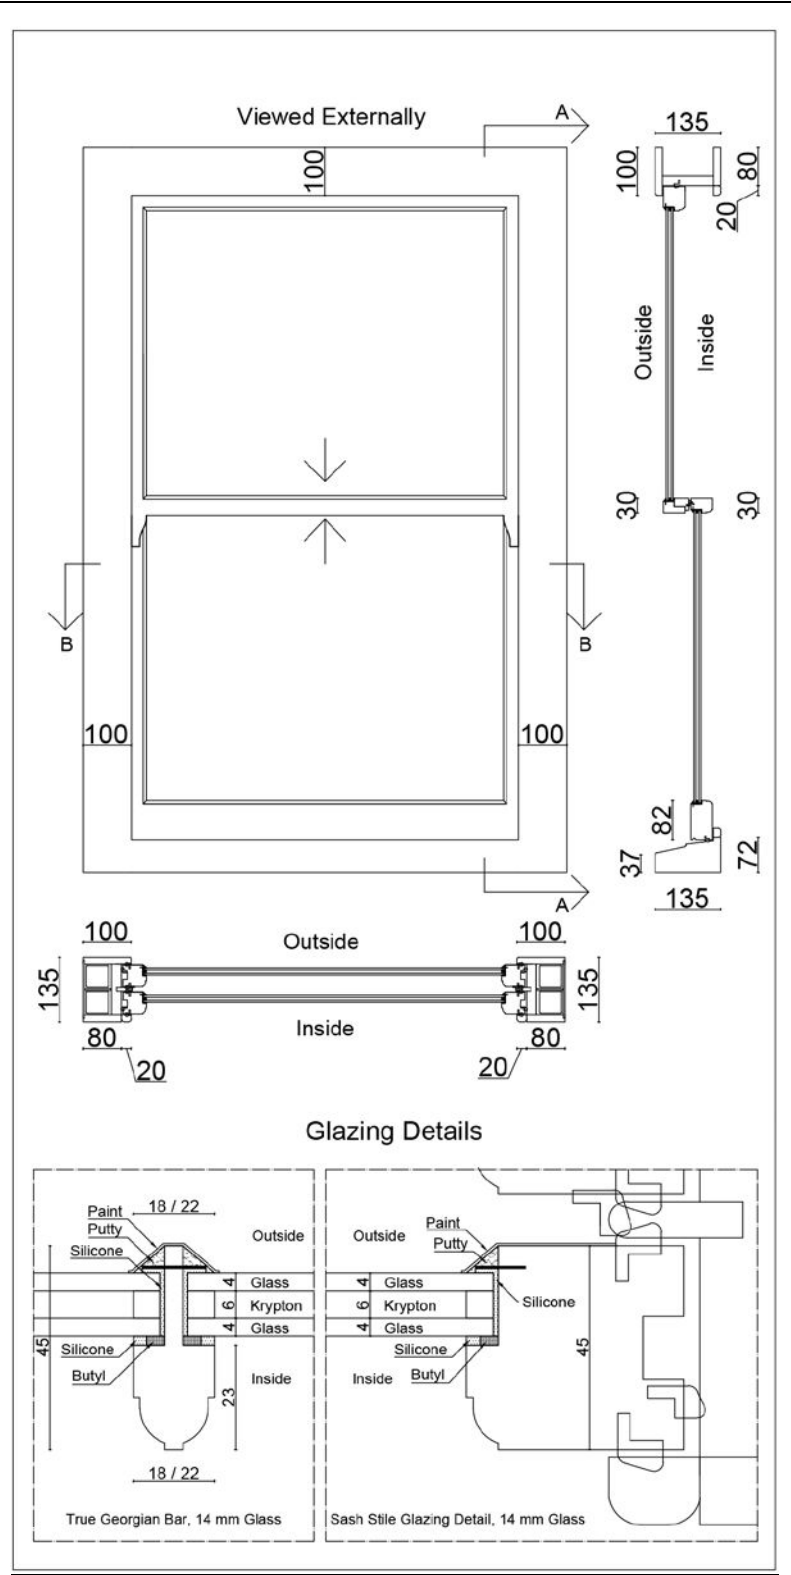

Notes:

- 7 or 8mm glazing rebate (depending on the system), true putty outside
- Sprig fixing under putty to fix the glass
- If using 3mm heritage spacer bar, the max glass sizes are 750mm X 1000 mm
- Due to max glass sizes we must have true Georgian bars with 3mm heritage spacer
- No V-JOINTS ON any part of this system

This is not an order. These details will be transferred to our system, and Order Confirmation will be sent to you for final check & sign off.

Email quotes and orders to sales@atwindows.com